

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
14 August 2003 (14.08.2003)

PCT

(10) International Publication Number
WO 03/066933 A1

(51) International Patent Classification⁷: C23C 16/517, 16/452, 16/50

(21) International Application Number: PCT/NL03/00037

(22) International Filing Date: 17 January 2003 (17.01.2003)

(25) Filing Language: Dutch

(26) Publication Language: English

(30) Priority Data:
1019781 18 January 2002 (18.01.2002) NL

(71) Applicants (for all designated States except US): NEDERLANDSE ORGANISATIE VOOR TOEGEPAST-NATUURWETENSCHAPPELIJK ONDERZOEK TNO [NL/NL]; Schoemakerstraat 97, NL-2628 VK Delft (NL). TECHNISCHE UNIVERSITEIT EINDHOVEN [NL/NL]; Den Dolech 2, NL-5612 AZ Eindhoven (NL).

(72) Inventors; and


(75) Inventors/Applicants (for US only): LINDEN, Joannes, Leonard [NL/NL]; Schalmstraat 13, NL-5615 AC Eindhoven (NL). ALCOTT, Gregory, Robert [GB/NL]; Jan Carstensweg 269, NL-5665 TJ Geldrop (NL). HAMERS, Edward, Aloys, Gérard [NL/NL]; Wijnpeerstraat 79, NL-5632 MG Tilburg (NL). VAN DE SANDEN, Mauritijs, Cornelis, Maria [NL/NL]; Jan van Beverwijkstraat 39, NL-5017 JC Tilburg (NL).

(74) Agent: PRINS, A.W.; Nieuwe Parklaan 97, NL-2587 BN Den Haag (NL).

(81) Designated States (national): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ,

[Continued on next page]

(54) Title: METHOD FOR DEPOSITING INORGANIC/ORGANIC FILMS

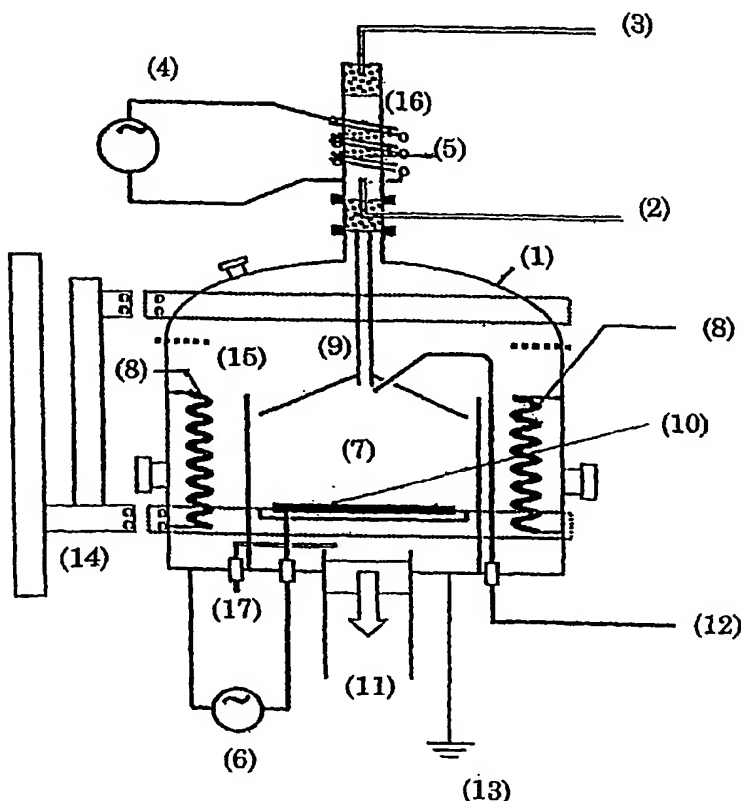

(57) Abstract: The present invention describes a method for applying a hybrid coating to a substrate. A coating according to the invention is formed by an inorganic component and an organic component. As a result, this coating has the hybrid character whereby the advantages of inter alia hardness are combined with the flexibility. The invention also describes a device for the manufacture of a hybrid coating.

WO 03/066933 A1



LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

(84) **Designated States (regional):** ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI,

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

METHOD FOR DEPOSITING INORGANIC/ORGANIC FILMS

The invention relates to methods for the manufacture of hybrid coatings and to devices for the manufacture thereof.

Hybrid materials that are built up from inorganic and organic components form a very important development within materials technology. These materials combine the favorable properties of inorganic and ceramic materials, such as high mechanical strength and a high degree of wear and scratch resistance, with the favorable properties such as a high degree of flexibility and impact resistance of organic materials. Hybrid materials are formed from inorganic and organic components by bonding these chemically with each other at a molecular level. They can be built up as interwoven networks, as interwoven networks mutually bonded by covalent chemical bonds and as interwoven networks having therein homogeneously distributed nanoparticles, which may or may not be covalently bonded, of, e.g., silicon, aluminum, zirconium, cesium, molybdenum or titanium oxides, and/or nitrides and/or carbides thereof.

Coatings manufactured from hybrid materials have a multiplicity of applications. It is possible to apply these materials in a patterned or completely covering manner. The combination of flexibility and hardness makes them ideal as coatings for plastics, in particular plastics from the ophthalmic industry. The low permeability (oxygen, water) of hybrid materials provides for excellent barriers for food packaging and through adaptation of the organic network, anti-adhesion layers for use in bathrooms or on kitchen utensils can be manufactured.

Currently, hybrid coatings are manufactured by means of wet-chemical techniques and deposited on the article of interest, a substrate, by means of dipping, spraying, flow-coating or spin-coating. However, these methods for the manufacture of hybrid coatings require several process steps, long

curing periods, prolonged preserving steps and the use of large amounts of solvents.

In the use of CVD (chemical vapor deposition) according to the prior art, it is difficult to deposit a hybrid material of a desired composition under controlled conditions as a coating on a substrate. The activation in a chemical vapor of the separate components requires completely different conditions for the inorganic and for the organic component. As a result, obtaining a fully integrated network of the two components is very difficult.

One object of the present invention is to provide methods for the application of a hybrid coating that obviate the problems of the prior art.

Another object of the present invention is to provide a hybrid coating having improved scratch resistance.

Surprisingly, it has been found that an improvement for the wet-chemical coating method from the prior art can be obtained by making use of plasma activated deposition of the hybrid material from a chemical vapor phase, whereby nanoparticles are captured in the coating. A hybrid coating consisting of an organic and an inorganic component having improved wear properties could be manufactured *inter alia* by a process of chemical vapor deposition or CVD with two separate plasmas.

The present invention relates to a method for applying a hybrid coating to a substrate, which coating comprises an inorganic and an organic component and which inorganic component comprises nanoparticles, wherein precursors for these components are activated in one or more plasma sources for plasma activated deposition of a chemical vapor phase and wherein the activated precursors are combined before they are deposited on the substrate from the chemical vapor phase for forming the coating.

The present invention further relates to a method for applying a hybrid coating to a substrate, which coating comprises an inorganic and an organic component and which inorganic component comprises nanoparticles,

wherein precursors for these components are activated in two or more separate plasma sources for plasma activated deposition of a chemical vapor phase and wherein one of the two activated precursors passes the plasma for activation of the other precursor whereafter the activated precursors are combined before they are deposited on the substrate from the chemical
5 vapor phase for forming the coating.

Further, the invention relates to a hybrid coating which is obtained according to a method of the invention and to products which comprise such a hybrid coating.

10 The invention further provides a device for applying a hybrid coating of an inorganic and an organic component to a substrate through plasma activated deposition of a chemical vapor phase, which comprises a reactor space provided with a carrier for a substrate, and at least two separate plasma sources for forming the inorganic and the organic component, the
15 separate plasma sources being situated in the processing direction such that the two activated precursors are combined before being deposited on the substrate.

In addition, the invention provides a device for applying a hybrid coating of an inorganic and an organic component, which inorganic
20 component comprises nanoparticles, to a substrate through plasma activated deposition of a chemical vapor phase, which comprises a reactor space provided with a carrier for a substrate, and at least two separate plasma sources for forming the inorganic and the organic component, the separate plasma sources being situated in the processing direction such that
25 one of the two activated precursors passes the plasma for activation of the other precursor before being deposited on the substrate.

A coating according to the invention is formed by an integrated network of an inorganic component and an organic component. As a result, this coating has the hybrid character whereby the advantages of hardness
30 are combined with a high degree of flexibility.

A hybrid coating manufactured according to a method of the invention is built up as interwoven networks having therein homogeneously distributed nanoparticles which may or may not be covalently bonded, of, e.g., silicon oxides, metal oxides, silicon carbides, metal carbides, silicon
5 nitrides and/or metal nitrides or combinations thereof. The nanoparticles preferably have a diameter of less than 450 nm, more preferably a diameter of less than 100 nm.

Hybrid materials according to the present invention may be built up from a large variety of inorganic and organic components which are
10 chemically bonded to each other at a molecular level. Thus, a hybrid coating according to the invention can comprises an inorganic (for instance glassy) network that has been modified with organic residue groups. Such a structure is sometimes referred to as Ormocer. A hybrid coating according to the invention having the structure that is designated as Ormocer can
15 comprise an organically modified matrix based on a metal oxide, metal carbide and/or metal nitride or a silicon oxide, silicon carbide and/or silicon nitride. Through the character of the plasma activated deposition according to the invention, the organic residue group can take any form in which carbon, silicon and optionally oxygen atoms or carbon, metal and optionally
20 oxygen atoms are combined with each other.

For the metal, any metal can be chosen. Preferably, the metal is selected from the group consisting of aluminum, cadmium, cerium, chromium, cobalt, gold, copper, lanthanum, lead, manganese, molybdenum, nickel, osmium, palladium, platinum, tin, titanium, vanadium, tungsten,
25 iron, silver, zinc, zirconium, alkali metals and alkaline earth metals. More preferably, the metal is Al, Mo, Ti, Zr, Cs, Pt or Sn.

An alternative coating that can be realized by the use of a method according to the invention comprises organic polymers which have been bonded together to form a continuous or discontinuous matrix, and further
30 comprises inorganic very small particles (nanoparticles) of metal or silicon

oxides or inorganic network structures. Such a coating structure is sometimes referred to as a Ceramer.

Another alternative coating that can be realized by the use of a method according to the invention comprises a metallic matrix which further
5 comprises inorganic very small particles (nanoparticles) of metal or silicon oxides or inorganic network structures.

A coating that is realized in any case by the use of a method according to the invention comprises the inorganic network structure with organic residue groups of the structure that are based on an Ormocer but in which
10 further very small inorganic particles of metal or silicon oxides, which may or may not be chemically bonded, are present. Such a structure is sometimes referred to by the term Nanomer.

The different constituents or components of a hybrid coating according to the invention are preferably formed from precursor molecules in a process
15 of precursor activation. During this activation, the precursor molecules are dissociated. Dissociation of the precursors can be done by means of thermal dissociation, laser dissociation or other suitable methods that are known in the art. A particular preference is expressed for a method whereby the precursor molecules are activated by means of a plasma. According to the
20 present invention, with great preference, the activation of the organic and inorganic precursors takes place in separate plasmas.

For the formation of an inorganic component, in many cases a precursor for a metal oxide, metal nitride, or metal carbide or a silicon oxide, silicon nitride or silicon carbide will be used. Since in the plasma
25 strong dissociative activation takes place, as precursor for an inorganic component, compounds that comprise a direct metal-carbon, a metal-hydrogen, a metal-nitrogen, a metal-halide, or a metal-oxygen bond, such as organometal or metallorganic compounds, metal alkoxydes, metal halides, metal carboxylates, or metal- β -diketonates can be chosen. It is also possible
30 to use, as precursor for an inorganic component, compounds which comprise

a direct silicon-carbon, a silicon-hydrogen, a silicon-nitrogen, a silicon-halide, or a silicon-oxygen bond, such as organosilicon compounds, silicon alkoxydes, silicon halides, siloxanes, silanes, silazanes, silicon carboxylates, or silicon- β -diketonates.

5 In case an organometal compound is selected, for the metal, any metal can be selected. Preferably, the metal is selected from the group consisting of aluminum, cadmium, cerium, chromium, cobalt, gold, copper, lanthanum, lead, manganese, molybdenum, nickel, osmium, palladium, platinum, tin, titanium, vanadium, tungsten, iron, silver, zinc, zirconium, alkali metal and
10 alkaline earth metal. Preferably, the metal compound is selected from the group consisting of a metal alkoxyde, carboxylate or β -diketonate. With greater preference, the organometal compound is a metal alkoxyde, carboxylate or β -diketonate in which the metal is Al, Mo, Ti, Zr, Cs, Pt or Sn.

15 For the formation of the nanoparticles, preferably a part of the inorganic component is deposited in the form of nanoparticles. These nanoparticles are formed through substantially complete dissociation of the inorganic precursors, such as, for instance, the metal or silicon alkoxydes, and condensation of activated molecules to virtually crystalline
20 nanoparticles. Once captured and covalently bound, or not, in the hybrid coating, these nanoparticles offer the advantage that they impart very high scratch resistance to the hybrid coating. Preferably, in an embodiment according to the present invention, nanoparticles are formed having a diameter between 1 and 200 nm. With greater preference, the nanoparticles
25 possess a diameter between 1 and 50 nm.

When an organic molecule is introduced into a plasma, the monomer draws energy from the plasma through non-elastic impacts and it is activated and fragmented into activated smaller molecules. The activated monomers combine with each other, thereby forming larger molecules,
30 eventually resulting in a polymer. Because the plasma will fragment most

organic compounds, plasma polymers can be deposited from virtually any organic monomer. Plasma polymers are in most cases highly branched and crosslinked, in most cases they are insoluble and adhere to solid surfaces. The chemical and physical properties of the plasma polymers depend on the precursor used, which is mostly introduced into the plasma in gas or vapor form, and the type of discharge (e.g. direct current, radiofrequency waves or microwaves) and the energy power introduced.

As precursor for an organic component, a multiplicity of organic compounds can be used. In fact, basically all conceivable organic substances can be activated as precursor in the organic plasma, and the components that are formed therefrom can be used in coatings according to the present invention.

As precursor for an organic component, in general, alkanes, alkynes, alkenes, arenes and optionally wholly or partly (cyclo)alkyl-, aryl-, aralkyl-, allyl-, methoxy-, halogen-, hydroxy-, amino-, nitro-, cyano-, epoxy, glycidoxo, (meth)acrylate substituted derivatives thereof are suitable for use in the present invention. Preferably, short chain alkanes (C_{1-6}), acrylate, styrene or carbon-fluorine compounds (CF_4 , C_2F_4 , C_2F_6 and C_4F_{10}) are used as organic precursor.

In the present description, the term alkanes is understood to refer to acyclic, branched or unbranched hydrocarbon of the general formula C_nH_{2n+2} having from 1 to 10, preferably from 1 to 8 carbon atoms, such as ethane, methane, propane and pentane.

The term alkenes is understood to refer to acyclic branched or unbranched hydrocarbon having one double carbon-carbon bond and a general formula of C_nH_{2n} having from 1 to 10, preferably from 1 to 8 carbon atoms. This is also understood to include the acyclic branched or unbranched hydrocarbons having more than one double carbon-carbon bond such as alkadienes, alkatrienes, etc.

The term alkynes is understood to refer to acyclic branched or unbranched hydrocarbons having a triple carbon-carbon bond and having the general formula C_nH_{2n-2} having from 1 to 10, preferably from 1 to 8 carbon atoms. This is also understood to include the acyclic branched or unbranched hydrocarbons having more than one triple carbon-carbon bond, such as the alkadiynes, alkatriynes, etc.

In the present description, the term alkyl group refers to a monovalent group derived from an alkane through the removal of a hydrogen atom from one of the carbon atoms and comprises a straight chain or branched chain having from 1 to 10, preferably from 1 to 8 carbon atoms. The term (cyclo)alkyl group refers to an alkyl group or a cyclic alkyl radical. These last also encompass saturated or partly saturated monocyclic, bicyclic or tricyclic alkyl radicals in which each cyclic group contains 3 to 8 carbon atoms. Examples of such radicals are methyl, ethyl, n-propyl, isopropyl, n-butyl, isobutyl, sec-butyl, tert-butyl, pentyl, iso-amyl, hexyl, octyl, cyclopentyl, cyclopentenyl, cyclohexenyl, cyclohexyl, cyclopentadienyl and cyclooctadienyl.

The term aromatic group refers to arenes and substituted derivatives thereof, such as benzene, naphthalene, toluene and should be understood as comprising the heteroaromatic structures, such as thiophene and pyridine. Arenes refer to the monocyclic and polycyclic aromatic hydrocarbons. The term aryl refers to an aromatic or heteroaromatic ring system obtained from arenes by removal of a hydrogen atom from a ring carbon atom, such as a phenyl, naphthyl or anthracene group, optionally substituted with alkyl, methoxy, halogen, hydroxy, amino, nitro, or cyano.

The term aralkyl means an alkyl as defined above, in which one hydrogen atom has been replaced with an aryl group as defined above. Allyl refers to propene radicals $(CH_2)_2CH$. Halogen refers to fluorine, bromine, iodine or chlorine.

Organosilicon compounds, such as polydimethylsiloxanes (PDMS) with terminal trimethylsiloxy, hydroxy or hydride groups, hexamethyldisilazane (HMDSN), hexamethyldisiloxane (HMDSO), 1,3-divinyltetramethyl disiloxane (DVS), vinylpentamethyldisiloxane (VPMDSO), 1,1,3,3-
5 tetramethyldisiloxane (TMDSO), 1, 3, 5, 7-tetramethyl cyclotetrasilane (TMTSO), 2,4,6,8-tetravinyl-2, 4, 6, 8-tetramethylcyclotetrasiloxane (TVTMTSO), diacetoxy-di-tert-butoxysilane (DADBS), triethoxysilane (TRIES) methyltrimethoxysilane (MTS), 1,2-bis(trimethylsilyloxy)ethane (TMSE), tetramethoxysilane (TMOS), tetraethoxysilane (TEOS),
10 octamethyltrisiloxane (OMCTS), or tripropylsilane (TPS), organometal compounds and metal organic compounds also find very suitable application in embodiments according to the present invention and can be used with advantage as precursor of the organic as well as of the inorganic component.

Poly(p-xylylene), or parylene-N, can also be used with advantage as
15 precursor for the organic component, as well as dimers, such as di-p-xylylene, or monomers, such as p-xylylene, and optionally functionalized compounds obtained or derived therefrom.

By 'optionally functionalized' is meant that these compounds may be chemically derivatized, so that, incorporated into the coating, they impart to
20 this coating a functional property such as biocompatibility, hydrophobicity, anti-reflection or anti-stick properties. This can be realized, for instance, by the use of halogen functionalized derivatives, while the starting compounds have been halogenated with, for instance, fluorine or chlorine. Examples of functionalized compounds that can be used as precursor for the organic
25 components are PPXC ($[-CH_2-C_6H_3Cl-CH_2-]_2$ as dimer), and AF-4 ($CF_3-C_6H_4-CF_3$).

The ratio of inorganic precursor/organic precursor can be varied, to obtain a more, or less, flexible material.

In the present invention, a plasma is understood to mean a gaseous or
30 vaporous composition of constituents which under the influence of electric

energy generated by a plasma source, has been brought to (gas) discharge. The space in which this discharge is effected is limited by an electric field which is generated by an electric power source and by a physical separation, if any is present, such as, for instance, a glass tube, and is called a plasma
5 source.

In a wider sense, plasma source in the present invention is understood to mean an electric power source and the electrodes for generating an electric field as well as the space limited by this field, for discharge and activation of a gaseous or vaporous composition of constituents and any
10 physical separation present. If in the present description properties or embodiments are assigned to the plasmas, these properties or embodiments also hold for the plasma source as far as they relate to it, and *vice versa*.

A coating according to the invention with a Nanomer structure can be very suitably obtained by the use of a single plasma source.

15 However, in the present invention, preferably at least two plasma sources of a different nature are used. Thus, preferably, in addition to a high electron density plasma source, a low electron density plasma source is used. However, two or more plasma sources of the same type can also be used in the present invention.

20 A high electron density plasma source typically has an electron density between 5×10^{16} - 5×10^{19} electrons/m³. An example of such a plasma source is an ICP (inductively coupled plasma) plasma source or an ECR (Electron Cyclotron Resonance). A low electron density plasma source typically has an electron density between 5×10^{10} - 5×10^{16} electrons/m³. An example of a
25 low electron density plasma source is a CCP (capacitively coupled plasma) plasma source or a DC (direct current) plasma source.

Electron densities can be determined with methods known for that purpose, such as the Langmuir probe method, microwave or laser interferometry, or Thomson scattering.

A plasma composition in the present description is defined as a gaseous or vaporous composition which is supplied to the electric field generated by the plasma source to obtain the plasma regardless of whether this composition has already been brought to discharge.

5 A general embodiment of a device according to the invention for manufacturing a hybrid coating comprises a reactor space in which the chemical vapor deposition onto the substrate takes place and which is limited by a reactor vessel. The reactor space is provided with a carrier for a substrate. The device further comprises at least two separate plasma
10 sources for the activation of the inorganic and organic precursor components.

Different preferred embodiments of such a device are suitable for manufacturing hybrid coatings according to the invention. A preferred embodiment is represented in Fig. 1. There is shown a reactor vessel (1)
15 provided with a closed glass tube (16) at the top thereof, and an open communication (9) is provided between the reactor space (15) and the space limited by the glass tube (16).

Around the glass tube (16) an electric winding is arranged, which is connected to a first electric power source. This plasma source (4) can further
20 be provided with a first precursor inlet (2) and a second precursor inlet (3) through which supply of a precursor of an inorganic component, argon gas and optionally oxygen can take place.

In reactor space (15), by means of a second plasma source (6), a plasma may be situated through provision of electrodes (1, 10), one of the electrodes
25 (10) being also carrier for a substrate (10). This plasma source can be provided with its own precursor inlet (12).

The whole set-up can be suspended by way of a suspension device (14) and be provided with a grounding (13). Through the heating elements (8) the temperature of the reactor can be raised if required. Upon switching on
30 of the first electric power source, in a high electron density plasma source

(4) a plasma (5) is generated for activating the precursor of an inorganic component. Upon switching on of a second electric power source, in the low electron density plasma source (6) a plasma (7) is generated to activate a precursor for an organic component. Through the supply of gas through precursor inlets (2) and/or (3) and through simultaneous extraction of chemical vapors through outlet (11), the plasma of the high electron density plasma source (5) can move towards the reactor space (15) where it is directly captured in the low electron density plasma (7). Here, a further reaction of the high electron density plasma can take place, so that additional energy can be supplied to the inorganic component. As a consequence, the substrate provided on carrier (10) is then covered with a combination of organic and inorganic components and the additional energy supply provides for the growing coating being made denser. A certain fraction of the inorganic component will have condensed to very small particles and will be deposited as such.

This embodiment, however, concerns one of the possible embodiments and should not be construed as limiting the scope of the present invention. It will be clear to those skilled in the art that variations on the above described device are possible. Thus, it is possible to uncouple the high electron density plasma and the low electron density plasma. The design of the electric power sources, the manner in which the electric power source is arranged and the charge carriers are mutually coupled, and the distance between plasma and carrier for the substrate are not critical and can be adjusted. Suitable configurations for obtaining desired material properties can be determined through optimization.

Preferably, the coupled plasmas applied are high-frequency plasmas. A frequency of between 0.01 MHz and 10 GHz in this connection is very suitable for inducing discharge in the plasmas. It is greatly preferred that a frequency of between 1 and 50 MHz be used.

The plasmas can be situated in the direct vicinity of the substrate or at some distance therefrom. The situation where the substrate is arranged directly between the two electrodes (1, 10) of the low electron density plasma source (6) or in the electric field of a high electron density plasma source (4), in which cases a so-called direct plasma is involved, results in a higher thermal load on the substrate under the influence of exposure to high energy particles. Although not all substrates are suitable for high thermal loading, direct plasmas can still be used with great advantage in the present invention.

10 Preferably, in a device according to the invention, at least one plasma source is situated at some distance from the substrate. Such "remote" plasmas therefore find particularly suitable application in the present invention.

To pass the particles activated in the remote plasma to the substrate, it is practical that a device according to the invention be provided with transport means for a vapor phase. Such means can comprise "passive" means such as gravity, whereby the remote plasma, the substrate and the field of gravity are in one line. Also, active transport means for a vapor phase can be included in a device according to the invention. Such active systems can consist of a pressure gradient or an active air, vapor or gas stream in the processing direction. 'Processing direction' as used herein is the direction in which a plasma-activated particle must travel to reach the substrate and to deposit thereon.

25 An active air or gas stream can be generated by introducing air, vapor or gas with excess pressure into the device. To that end, a carrier gas such as N₂, argon, or any other suitable unreactive gas, or a gas involved in the activation reaction, such as oxygen, can be used.

Alternatively, an active air, vapor or gas stream can be generated by extracting air, vapor or gas from the device. The manner in which the pressure gradient or the active air, vapor or gas stream is obtained is not of

30

preponderant importance in methods and devices of the invention.

Preferably, the transport means for a vapor phase are realized by introducing gas with excess pressure into the device and simultaneously extracting vapor from the device, so that a reduced pressure, with respect to
5 atmospheric pressure, is created in the device. This further promotes a stable plasma discharge. A pressure between 0.01 and 1000 mbara finds suitable application in embodiments according to the present invention. Good results have been obtained at a pressure in the device between 0.1 and 50 mbara.

10 The plasmas that can be used in the present invention are aimed at forming from precursor molecules, reactive intermediates that can be deposited on the substrate. Depending on the energy supplied to the plasma source, the precursor will be activated into a reacted and dissociated intermediate. The extent of dissociation can be set by choosing the level of
15 the plasma source energy. Suitable powers in plasmas that are used in embodiments of the present invention are generally between 10 and 2500 Watts, with voltages varying between 0.001 and 5000 Volt.

Preferably, the plasma is pulsed to liberate the particles captured therein from the plasma volume and to effect deposition on the substrate to
20 be coated. Preferably, a pulse frequency of 1 to 100 Hz is used. With greater preference, a pulse of approximately 25 Hz (with a duty cycle between 5 and 10%) is used.

Concentrations of precursors in a plasma composition according to the invention are generally between 1 and 25 vol.%. Optionally, in addition
25 oxygen can be supplied to the plasma composition to a concentration of approximately 80%.

Besides precursor molecules, the plasma composition comprises an unreactive carrier gas such as N₂ or a noble gas such as argon, helium, neon, krypton, radon and/or xenon or a combination of these gases to
30 supplement the volume. The plasma volume is preferably supplemented

with argon gas. The formation of the inorganic precursor plasma is preferably effected by bringing the mixture of oxygen, precursor molecules and argon gas to electric discharge in a plasma source. The reactions thereby occurring lead to dissociation or activation of the precursor molecules.

Upon leaving the plasma, the activated intermediates preferably move substantially towards the substrate on which they can deposit and if possible substantially polymerize/condense. A considerable advantage of the present invention is that it is possible according to the proposed method to adjust the composition, and hence the properties of the hybrid coating, to any desired specification or application.

The ratio of inorganic to organic components, the density of the hybrid material that is manufactured in this way and the amount of nanoparticles present can be fully controlled. In this way, many different specific properties can be imparted to the material. Also, to the different plasmas additives can be added, enabling specific properties to be imparted to a coating according to the invention. The following properties can be recognized and specifically imparted:

- Anti-soiling action can be achieved by the use or addition of halides in the plasma in that these will reduce the surface energy of the eventual coating.

- A high degree of wear resistance is achieved by incorporating nanoparticles of silicon oxides or metal oxides in the coating.

- Enhanced barrier action can be achieved by depositing as large an amount of inorganic material as possible. Also, there is the possibility of alternately stacking organic and inorganic layers onto each other and in this way enhancing the barrier action.

- The color of the coating can be varied by the use of specific layer thicknesses or by vapor depositing pigments.

- The structure or the porosity of the coating can, if necessary, be adjusted at will by choosing the plasma parameters such that to a greater or lesser extent a bias voltage is created on the substrate. Further, it is possible to start from a DC (direct current) plasma source.

5

- The hydrophobicity or hydrophilic character of the coating can be varied by the use of, respectively, carbon-fluorine compounds and the addition of extra hydrogen atoms in the form of H_2 gas to a plasma. What can thus be achieved, for instance, is that optical materials (spectacle glasses, lenses) get fogged less easily.

10

Any substrate is suitable to be clad with a coating according to the invention provided that the activated intermediates can adhere to it. Suitable substrates for applying a coating according to the present invention are substrates of plastic, including glass-replacing plastic. Such glass-replacing plastics can be used to replace spectacle glass, in solar cells and as material for lenses and car headlight glass. Also substrates of metal, glass, ceramics, paper or textile can be clad with a coating according to the present invention.

15

A coating according to the invention also finds suitable application as a barrier coating such as it is used, for instance, in P-LEDs (polymeric light emitting diode) in the semiconductor industry, but also in packaging material in the food industry, such as improved PET bottles or crisps bags. Virtually any application where a material having a higher wear resistance or scratch resistance is desired can benefit from the coating and the method of preparation which is provided in the present invention.

20

25

The thickness of the coating can be adjusted by varying the vapor deposition time (the period in which the substrate is exposed to the chemical vapor phase). Thicker coatings are achieved after longer vapor deposition times. Optionally, the deposition rate of the different activated components

can be increased by supplying more energy to the plasmas or by increasing the gas or vapor stream through the device.

The substrate can optionally be cleaned or otherwise treated to improve the adhesion of activated intermediates, and hence the entire
5 coating. Such treatment methods are known in the art and comprise treatment with, for instance, HF, NH₄OH or H₂SO₄, or with the aid of a plasma according to methods known for that purpose.

Example 1.

10 Method for CVD of a hybrid coating.

With the aid of a device as represented in Fig. 1, a hybrid coating was manufactured on a plastic substrate, e.g. PC (polycarbonate) or ABS (acrylonitrile butadiene styrene). As precursor for the inorganic component, tetraethoxysilane was used. A high electron density plasma to activate this
15 component was composed on the basis of 4% precursor, 40% oxygen, supplemented with argon and a total flow of 0.5 SLM (Standard liter per minute).

As precursor for the organic component, separately, both 1,2-bis(trimethylsilyloxy)ethane (TMSE), tetraethoxysilane (TEOS) and tri-n-
20 propylsilane (TPS) were used. A low electron density plasma to activate this component was composed on the basis of 15% precursor (TMSE), 0% oxygen, supplemented with argon and a total flow of 0.1 SLM. Further, this plasma comprised products coming from the high electron density plasma.

The high electron density plasma was generated by setting a power of
25 300 watt, resulting in a high-frequency alternating voltage of at most 2000 Volts (RF peak) and thus allowing the gases to discharge.

The low electron density plasma was generated by applying an electric voltage of 150 volts (DC bias) between the electrode/carrier (10) and the reactor casing (1) and to allow this to discharge with a frequency of 13.56
30 MHz (set power of 300 Watt).

The high electron density plasma was pulsed with a frequency of 25 Hz (with a duty cycle between 5 and 10%). The pressure in the reactor vessel was lowered to 1.5 mbara.

5 The reactor operated at room temperature. During the vapor deposition process, some heating of the substrate occurred as a result of the plasma but higher temperatures than 150 °C were not observed.

10 In 10 minutes time, a coating was obtained of a layer thickness between 1 and 1.5 micrometer. FTIR analyses show *inter alia* Si-C, Si-O and C-H bonds. Taber tests to measure the wear give a comparable result to that obtained with hybrid coatings applied via wet chemical techniques. The transmission in the visible range of the obtained coatings is greater than 70%.


CLAIMS

1. A method for applying a hybrid coating to a substrate, which coating comprises an inorganic and an organic component and which inorganic component comprises nanoparticles, wherein precursors for these components are activated in one or more plasma sources for plasma
5 activated deposition of a chemical vapor phase and wherein said activated precursors are combined before they are deposited on the substrate from the chemical vapor phase for forming the coating.
2. A method according to claim 1, wherein precursors for said organic and inorganic component are activated in two or more separate plasma
10 sources for plasma activated deposition of a chemical vapor phase.
3. A method according to claim 2, wherein one of the two activated precursors passes the plasma for activation of the other precursor, whereafter said activated precursors are combined.
4. A method according to claim 3, wherein the activated inorganic
15 precursor passes the plasma for activation of the organic precursor.
5. A method according to claim 3, wherein the activated organic precursor passes the plasma for activation of the inorganic precursor.
6. A method according to any one of the preceding claims, wherein the inorganic component is generated in a high electron density high-frequency
20 plasma.
7. A method according to claim 6, wherein the high electron density high-frequency plasma is pulsed.
8. A method according to any one of the preceding claims, wherein the organic component is generated in a low electron density high-frequency
25 plasma.
9. A method according to claim 8, wherein the low electron density high-frequency plasma is pulsed.

10. A method according to any one of the preceding claims, wherein the precursor for the inorganic component comprises metal-carbon, metal-hydrogen, metal-nitrogen, metal-halide, and/or metal-oxygen bonds.
11. A method according to claim 9, wherein the precursor for the
5 inorganic component comprises an organometal compound, a metal organic compound, metal alkoxide, metal carboxylate, or metal- β -diketonate.
12. A method according to claim 10 or 11, wherein the metal comprises aluminum, titanium, zirconium, molybdenum, cesium, tin and/or platinum.
13. A method according to any one of the preceding claims, wherein the
10 precursor for the inorganic component comprises silicon-carbon, silicon-hydrogen, silicon-nitrogen, silicon-halide, and/or silicon-oxygen bonds.
14. A method according to claim 13, wherein the precursor for the inorganic component comprises an organosilicon compound, silicon
15 alkoxide, siloxane, silane, silazane, silicon carboxylate, or silicon- β -diketonate.
15. A method according to any one of the preceding claims, wherein the precursor for the organic component comprises alkanes, alkynes, alkenes, arenes, and optionally wholly or partly (cyclo)alkyl-, aryl-, aralkyl-, allyl-, methoxy-, halogen-, hydroxy-, amino-, nitro-, or cyano-substituted
20 derivatives thereof.
16. A method according to any one of claims 1-14, wherein the precursor for the organic component comprises short chain alkanes, acrylate, styrene or carbon-fluorine compounds.
17. A method according to any one of the preceding claims 1-14,
25 wherein the precursor for the organic component comprises an organosilicon compound, organometal compound, metal organic compound or p-xylylene, and/or optionally functionalized compounds derived therefrom.
18. A method according to any one of the preceding claims, wherein the
30 separate activation sources are situated in a reactor in which a pressure of between 0.01 and 1000 mbara prevails.

19. A method according to any one of the preceding claims, wherein the separate activation sources are situated in a reactor in which a pressure of 0.1 to 50 mbara prevails.
20. A method according to any one of the preceding claims, wherein the
5 plasmas are formed by bringing a mixture of precursor material, argon gas and optionally oxygen to electrical discharge.
21. A method according to any one of claims 7-20, wherein to the low electron density plasma, also vapor coming from the high electron density plasma is supplied.
- 10 22. A method according to any one of claims 7-20, wherein to the high electron density plasma, also vapor coming from the low electron density plasma is supplied.
23. A hybrid coating, obtainable by a method according to any one of claims 1-22.
- 15 24. A product comprising a hybrid coating according to claim 23.
25. A device for applying a hybrid coating of an inorganic and an organic component to a substrate through plasma activated deposition of a chemical vapor phase, which comprises a reactor space provided with a carrier for a substrate, and at least two separate plasma sources for forming
20 the inorganic and the organic component, wherein the separate plasma sources are situated in the processing direction, such that the two activated precursors are combined before being deposited on the substrate.
26. A device according to claim 25, wherein the separate plasma sources are situated in the processing direction, such that one of the two
25 activated precursors passes the plasma for activation of the other precursor before being deposited on the substrate.
27. A device according to claim 25 or 26, wherein one of the plasma sources is situated in the reactor space.
28. A device according to any one of claims 25-27, wherein one of the
30 plasma sources forms a direct plasma.

29. A device according to any one of claims 25-28, wherein one of the plasma sources is a plasma source for generating a high electron density high-frequency plasma and another plasma source is a plasma source for generating a low electron density high-frequency plasma.
- 5 30. A device according to claim 29, wherein the plasma sources are pulsating.
31. A device according to any one of claims 26-30, which further comprises transport means for a vapor phase.

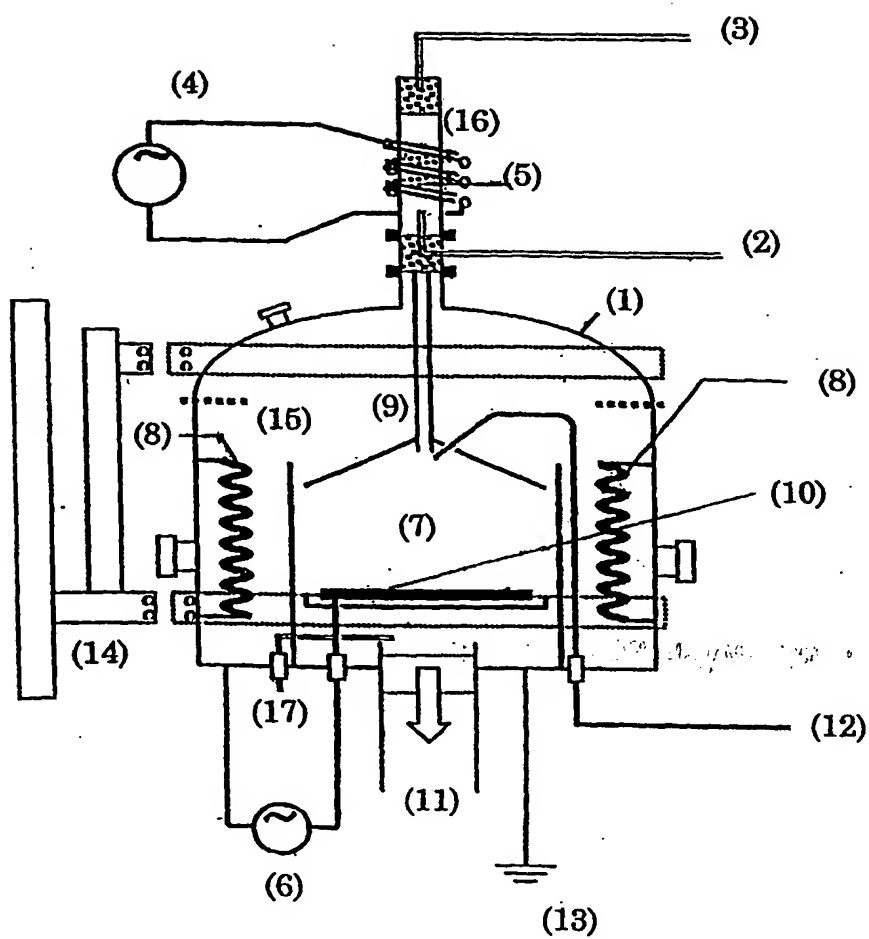

Figuur 1.

DT04 Rec'd PCT/PTO 12 JUL 2004

THIS PAGE BLANK (USPTO

INTERNATIONAL SEARCH REPORT

PCT/NL 03/00037

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 C23C16/517 C23C16/452 C23C16/30

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 C23C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

PAJ, WPI Data, IBM-TDB, EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 01 36703 A (NANO SCALE SURFACE SYSTEMS INC ;SILICON VALLEY GROUP (US)) 25 May 2001 (2001-05-25)	1-6,8, 13,14, 17, 21-29,31
Y	page 11, line 9 -page 13, line 30; figure 3E	7,9-16, 18-20,30
X	WO 99 61371 A (TERRANOVA MARIA LETIZIA ;UNI DI ROMA TOR VERGATA (IT); ROSSI MARCO) 2 December 1999 (1999-12-02) page 4, line 19 -page 5, line 15 page 11, line 1 - line 21	1,10,15, 16,20, 21,23,24

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the international search

2 May 2003

Date of mailing of the international search report

09/05/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer

Ekhult, H

INTERNATIONAL SEARCH REPORT

PCT/NL 03/00037

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	OKAMOTO A ET AL: "STRUCTURE OF GOLD-HYDROCARBON COMPOSITE THIN FILMS DEPOSITED USING LOW-VOLTAGE PLASMA SPUTTERING METHOD" THIN SOLID FILMS, ELSEVIER-SEQUOIA S.A. LAUSANNE, CH, vol. 281/282, no. 1/2, 1 August 1996 (1996-08-01), pages 390-392, XP000643425 ISSN: 0040-6090 the whole document	1,5,8, 15,16, 23,24
X	PATENT ABSTRACTS OF JAPAN vol. 2000, no. 20, 10 July 2001 (2001-07-10) & JP 2001 081570 A (NISSIN ELECTRIC CO LTD), 27 March 2001 (2001-03-27) abstract -& US 6 383 896 B1 (KIRIMURA ET AL) 7 May 2002 (2002-05-07) example 2	25-29,31
X	US 5 094 879 A (OKANO HARUO ET AL) 10 March 1992 (1992-03-10) column 6, line 4 -column 7, line 47; figures 2,4	25-29,31
Y	US 5 522 343 A (ARAKI SHIN ET AL) 4 June 1996 (1996-06-04) figures 3-5B; example 3	13-16, 18,19
Y	FR 2 708 624 A (NEUVILLE STEPHANE) 10 February 1995 (1995-02-10) column 7, line 4 - line 15; claim 1	7,9-12, 20,30
A	US 6 068 884 A (LOPATA EUGENE ET AL) 30 May 2000 (2000-05-30) the whole document	1-24

INTERNATIONAL SEARCH REPORT

PCT/NL 03/00037

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0136703	A	25-05-2001	AU 1776401 A EP 1252358 A1 WO 0136703 A1	30-05-2001 30-10-2002 25-05-2001
WO 9961371	A	02-12-1999	IT MI981159 A1 AU 4366399 A WO 9961371 A2 EP 1098845 A2	26-11-1999 13-12-1999 02-12-1999 16-05-2001
JP 2001081570	A	27-03-2001	US 6383896 B1	07-05-2002
US 5094879	A	10-03-1992	DE 4020816 A1 JP 3111578 A KR 9306301 B1 US 5658389 A	03-01-1991 13-05-1991 12-07-1993 19-08-1997
US 5522343	A	04-06-1996	JP 1955646 C JP 2080570 A JP 6089453 B JP 2217475 A US 5741364 A DE 68915088 D1 DE 68915088 T2 EP 0359264 A2 KR 9403787 B1 US 5122431 A US 5447816 A JP 3010075 A	28-07-1995 20-03-1990 09-11-1994 30-08-1990 21-04-1998 09-06-1994 18-08-1994 21-03-1990 03-05-1994 16-06-1992 05-09-1995 17-01-1991
FR 2708624	A	10-02-1995	FR 2708624 A1	10-02-1995
US 6068884	A	30-05-2000	AU 3562799 A CA 2330040 A1 CN 1302254 T EP 1089874 A1 JP 2002513203 T TW 476705 B WO 9955526 A1	16-11-1999 04-11-1999 04-07-2001 11-04-2001 08-05-2002 21-02-2002 04-11-1999

THIS PAGE BLANK (US)